



European distributor of
Hosebun®



sales@specialimportdenmark.dk
+45 50 51 54 52

The Best Hose Suspension in the World

Hosebun[®]

MODEL
HB 100 ED
 For
Hose I.D. 1" (2.5cm)



Material/Materiale	Urethane
Length/Længde	16 inches / 40.64 centimeters
Shipping Weight/Fragtvægt	3 pounds / 1.4 kilograms
Shipping Dimensions/Fragtdimensioner	21x8x4" / 50.8x21x7.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	6 inches / 15.24 centimeters
Sling type/Slyngetype	"D-RING" (RS 16 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: The most popular petroleum hose model. Used throughout the world at refueling stations. Often used conjunction with retractors.

The Best Hose Suspension in the World



MODEL
HB 125 ED
 For
Hose I.D. 1 1/4" (3.1cm)



Material/Materiale	URETHANE
Length/Længde	17.50 inches / 44.45 centimeters
Shipping Weight/Fragtvægt	3.25 pounds / 1.48 kilograms
Shipping Dimensions/Fragtdimensioner	21x8x4" / 50.8x21x7.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	5.75 inches / 14.6 centimeters
Sling type/Slyngetype	"D-RING" (RS 16 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Used with petroleum hose, refueling stations with hyhose retractors, hydraulic hose bundles and theatrical cabling.



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52

The Best Hose Suspension in the World



MODEL
HB 150 ED
 For
Hose I.D. 1 1/2" (3.8cm)



Material/Materiale	URETHANE
Length/Længde	19.50 inches / 45.09 centimeters
Shipping Weight/Fragtvægt	3.75 pounds / 1.71 kilograms
Shipping Dimensions/Fragtdimensioner	21x8x4" / 50.8x21x7.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	4.50 inches / 11.43 centimeters
Sling type/Slyngetype	"D-RING" (RS 16 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Often used for bundled hoses/cable like theatrical cable for lighting and sound.

The Best Hose Suspension in the World



MODEL
HB 200 ED
 For
Hose I.D. 2" (5cm)



Material/Materiale	URETHANE
Length/Længde	18 inches / 45.72 centimeters
Shipping Weight/Fragtvægt	4 pounds / 1.81 kilograms
Shipping Dimensions/Fragtdimensioner	21x8x4" / 50.8x21x7.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	7.25 inches / 18.42 centimeters
Sling type/Slyngetype	"D-RING" (RS 200 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Available with Type 4 Hook Eye (RS 200H)



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52

The Best Hose Suspension in the World



MODEL
HB 200 SRD
For
Hose I.D. 2" (5cm)



Material/Materiale	URETHANE
Length/Længde	12 inches / 30.48 centimeters
Shipping Weight/Fragtvægt	2.5 pounds / 1.14 kilograms
Shipping Dimensions/Fragtdimensioner	13x5x3.5" / 33.5x13.5x9cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	9.60 inches / 24.38 centimeters
Sling type/Slyngetype	"D-RING" (RS 200 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Available with Type 4 Hook Eye (RS 200H)

The Best Hose Suspension in the World



MODEL
HB 300 D
 For
Hose I.D. 3" (8.0cm)



Material/Materiale	URETHANE
Length/Længde	12.75 inches / 32.39 centimeters
Shipping Weight/Fragtvægt	4.25 pounds / 1.93 kilograms
Shipping Dimensions/Fragtdimensioner	13.5x5.5x5" / 35x14x12cm
*Sling height/Slyngehøjde *Measured from top of the bun to the top of the sling	8.50 inches / 21.60 centimeters
Sling type/Slyngetype	"D-RING" (RS 300 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Light duty bun, Easier mounting with the "D-Ring" attachment.

The Best Hose Suspension in the World



Hosebun[®]

MODEL
HB 300 H
For
Hose I.D. 3" (8.0cm)



Material/Materiale	URETHANE
Length/Længde	12.75 inches /32.39 cm
Shipping Weight/Fragtvægt	4.25 pounds /2.28 kilograms
Shipping Dimensions/Fragtdimensioner	13.5x5.5x5" /35x14x12cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	14.75 inches /37.70 cm
Sling type/Slyngetype	Type 4 Hook Eye (RS 300H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	1500 lbs @ 5-1 safety factor
Max temperature/Max temperatur	200 degrees F/93.3 Celsius

Notes: Light duty bun with type 4 hook eye sling for increased strength and work safety.


www.Hosebun.com

 **Special Import Denmark**
European distributor
Sales@specialimportdenmark.dk
+45 50 51 54 52

The Best Hose Suspension in the World

Hosebun[®]


MODEL
HB 400 D
For
Hose I.D. 4" (10.0cm)



Material/Materiale	Urethane
Length/Længde	11.5 inches / 21.22 centimeters
Shipping Weight/Fragtvægt	5 pounds / 2.28 kilograms
Shipping Dimensions/Fragtdimensioner	13x7.5x6.5" / 33x19x16.5cm
Sling height/Slyngehøjde <small>Measured from top of the bun to the top of the sling</small>	8 inches / 20.00 centimeters
Sling type/Slyngetype	"D-RING" (RS 400 D)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	800 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Light duty bun, easier mounting with the "D-Ring" attachment. Often used to support tanker


The Best Hose Suspension in the World

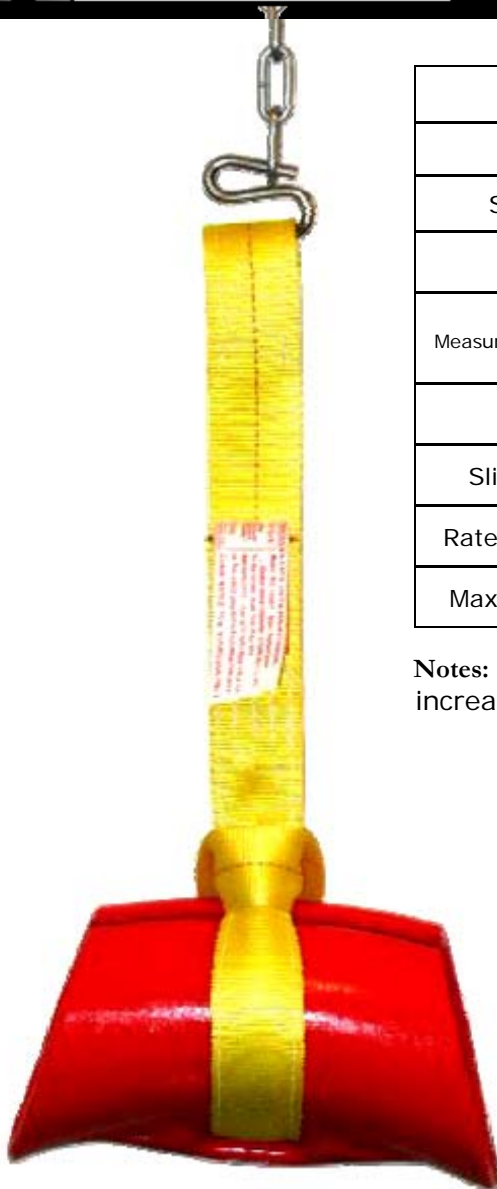

Material/Materiale	Urethane
Length/Længde	11.5 inches / 29.21 cm
Shipping Weight/Fragtvægt	5 pounds / 2.28 kg.
Shipping Dimensions/ Fragtdimensioner	22.5x9x15" / 57x23x30.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	16.0 inches / 40.64 cm
Sling type/Slyngetype	Type 4 Hook Eye (RS 400H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	1500 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Light duty bun with type 4 hook eye sling for increased strength and work safety.

The Best Hose Suspension in the World

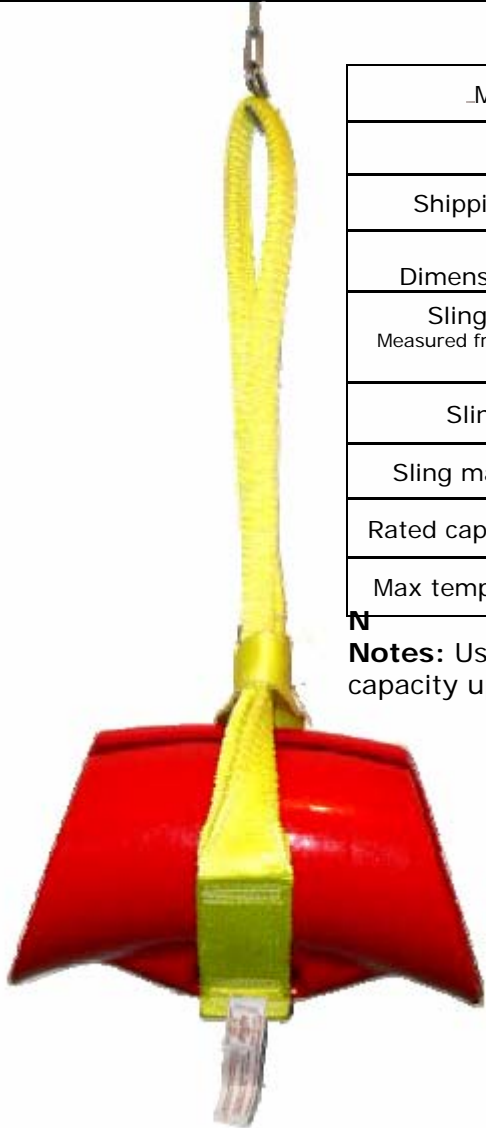

Material/Materiale	Urethane
Length/Længde	21.5 inches / 54.6 centimeters
Shipping Weight/Fragtvægt	16 pounds / 7.28 kilograms
Shipping Dimensions/Fragtdimensioner	22.5x9x15" / 57x23x30.5cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	22.5 inches / 57.15 centimeters
Sling type/Slyngetype	Type 4 Hook Eye (RS 600H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	8000 lbs @ 5-1 Safety Factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Use Heat Wrap Model HW 600 to extend temperature capacity up to 1100 degrees Fahrenheit (593 Celsius).

The Best Hose Suspension in the World



MODEL
HB 800 H
For
Hose I.D. 8" (20.0cm)



Material/Materiale	Urethane
Length/Længde	30.5 inches /77.47 cm
Shipping Weight/Fragtvægt	35 pounds /15.92 kg
Shipping Dimensions/Fragtdimensioner	31.25x12x15" /80x30.5x38cm
Sling height/Slyngehøjde <small>Measured from top of the bun to the top of the sling</small>	18 inches /45.72 cm
Sling type/Slyngetype	Type 4 Hook Eye (RS 800H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	12000 lbs @ 5-1 safety factor
Max temperature/Max temperatur	200 degrees F / 93.3 Celsius

Notes: Use Heat Wrap Model HW 800 to extend temperature capacity up to 1100 degrees Fahrenheit (59 Celsius)



 **Special Import Denmark**
European distributor
Sales@specialimportdenmark.dk
+45 50 51 54 52

The Best Hose Suspension in the World



MODEL
HB 1000 H
 For
Hose I.D. 10" (25.0cm)



Material/Materiale	Urethane
Length/Længde	40.75 inches /103.51 cm
Shipping Weight/Fragtvægt	60 pounds /27.20 kg
Shipping Dimensions/Fragtdimensioner	42x14x18" /105x34x46cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	19.25 inches /48.90 cm
Sling type/Slyngetype	Type 4 Hook Eye (RS 1000H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	15000 lbs @ 5-1 safety factor
Max temperature/Max temperatur	200 degrees F /93.3 Celsius

Notes: Use Heat Wrap Model HW 1000 to extend temperature capacity up to 1100 degrees Fahrenheit (593 Celsius).



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52

The Best Hose Suspension in the World



MODEL
HB 1200 H
 For
Hose I.D. 12" (30.0cm)



Material/Materiale	Urethane
Length/Længde	40.75 inches /103.51 cm
Shipping Weight/Fragtvægt	62 pounds /28.20 kg
Shipping Dimensions/Fragtdimensioner	42x14x18" /105x34x46cm
Sling height/Slyngehøjde Measured from top of the bun to the top of the sling	23.25 inches /59.06 centimeters
Sling type/Slyngetype	Type 4 Hook Eye (RS 1200H)
Sling material/Slyngemateriale	UV Resistant Treated Nylon
Rated capacity/Godkendt løfteevne	15000 lbs @ 5-1 safety factor
Max temperature/Max temperatur	200 degrees F /93.3 Celsius

Notes: Same mold as HB 1000H but with longer sling to accommodate 12" I.D Hose.



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52

The Best Hose Suspension in the World



Material:	Each Hosecaddy™ is made with a rugged steel construction that then undergoes hot dipped galvanization and powder coating to ensure years of maintenance-free protection performance.
Materialer:	Hver Hosecaddy™ er produceret i en kraftig stålkonstruktion som varmegalvaniseres og pulverlakeres for at sikre mange års vedligeholdelsesfri beskyttelse.
Weight:	The hose caddy at 93lbs is lightweight and durable.
Vægt:	Hosecaddy™ vejer 42,2 hvilket vil sige at den er både let slidstærk.
Dimensions:	45" long x 20 1/4" wide x 25" high
Dimensioner:	114,3 cm x 51,44 x 63,5 (LxBxH)
Load Capacity	Easy rolling heavy duty 6" swivel castors on all four corners have a working load capacity of 1600 lbs.
Belastningskapacitet:	Meget kraftige og let-rullende 6" styrehjul i alle fire hjørner giver en belastningskapacitet på 725,75 kg.
Hose Dimensions	Designed for 6" through 12" large bore hose or a bundle of small 3-4" hoses.
Slange-dimensioner:	Hosecaddy™ er designet til 6" og op til 12" store slanger eller et bundt af 3-4" slanger.

Notes: Powder Coating, in assorted colours, is available for small fee.
Designed to tip sideways for easy loading and unloading of the hose.

Pulverlakering i assorterede farver for en mindre merudgift.
Designet til at tippe sideværs for nem pålæsning og aflæsning af slanger.



The Best Hose Suspension in the World



Material:	Molded Plastic
Materiale:	Formstøbt plastic
Weight:	From 4 - 18 lbs (depends on model)
Vægt:	Fra 1,8 kg – 8,1 kg (afhængig af model)
Dimensions:	Depends on Model
Dimensioner:	Afhængig af model
Hose Dimensions	Models available to fit hose sizes from 2 inch up to 24 inches.
Slange dimensioner	Modellerne passer slanger fra 2 - 24".


*** * GET YOUR HOSE OFF THE GROUND * ***

**STACKABLE
DURABLE
AFFORDABLE**



 **Special Import Denmark**
European distributor
Sales@specialimportdenmark.dk
+45 50 51 54 52

The Best Hose Suspension in the World

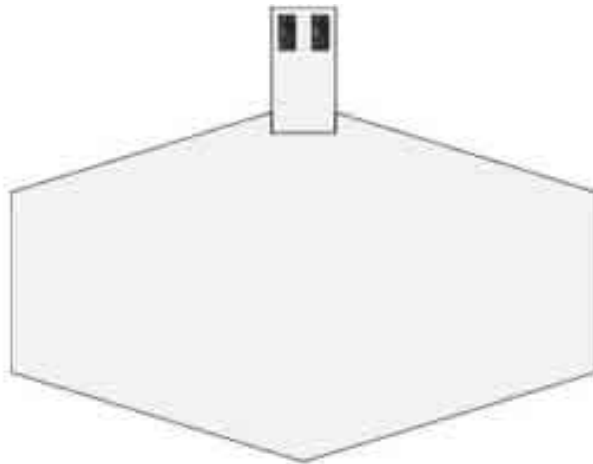

**heatwrap
(hw)**

Models	HW600, HW800, HW1000, HW1200
Material	Hybrid composit fiber

Notes: These heat blankets wrap around the hose fastening wit velcro strips. The wrapped hose is then placed inside the hosebun to protect it from temperatures up to 1100 degrees Fahrenheit (593 celsius).

The Best Hose Suspension in the World



D-RING SLING	models	sling model	rated capacity	I.D hose
	HB 100 ED	RS 16D	800lbs/364kgs	1"/2.5cm
	HB 125 ED	RS 16D	800lbs/364kgs	1.25"/3.1cm
	HB 150 ED	RS 16D	800lbs/364kgs	1.5"/3.8cm
	HB 200 ED	RS 200D	800lbs/364kgs	2"/5.0cm
	HB 200 SRD	RS 200D	800lbs/364kgs	2"/5.0cm
	HB 300 D	RS 300D	800lbs/364kgs	3"/8.0cm
	HB 400 D	RS 400D	800lbs/364kgs	4"/10cm
	sling safety factor 5:1			

Notes: All Hosebun models comes with their respective slings.
 All slings has the rated capacity of 800 lbs / 364 kgs.
 Sling safty factor 5:1
 Pull testing and certificates available



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52

The Best Hose Suspension in the World



TYPE 4 HOOK EYE	models	sling model	rated capacity	I.D hose	
	HB 200 SRH	RS 200H	1500lbs/682kgs	2"/5cm	
	HB 300 H	RS 300H	1500lbs/682kgs	3"/8cm	
	HB 400 H	RS 400H	1500lbs/682kgs	4"/10cm	
	HB 600 H	RS 600H	8000lbs/3640kgs	6"/15cm	
	HB 800 H	RS 800H	12000lbs/5455kgs	8"/20cm	
	HB 1000 H	RS 1000H	15000lbs/6820kgs	10"/25cm	
	HB 1200 H	RS 1200H	15000lbs/6820kgs	12"/30cm	
	sling safety factor 5:1				

Notes: All Hosebun models comes with their respective slings.
 All slings has the rated capacity of 800 lbs / 364 kgs.
 Sling safty factor 5:1
 Pull testing and certificates available



 **Special Import Denmark**
 European distributor
 Sales@specialimportdenmark.dk
 +45 50 51 54 52